



Manure spreader

CS spreader



Compact and flexible

- The CS spreader



CS spreader models

The compact CS spreader is particularly suitable for businesses with own machinery and ensures effective discharge of manure. The folding side panels enable a double use as a transport trailer.

- CS 75-95
- Loading capacity of 7.5 – 9.5 m³
- Easy operation

Contents

Spreading unit and transport floor	4-5
Superstructure and chassis	6
Operation and technical data	7

Robust design for strong performance

– Spreading unit and transport floor

- ✚ Fine distribution
- ✚ Perfect spreading pattern
- ✚ High throughput rate
- ✚ Ideal for spreading on grassland



4-beater spreading unit

- Four vertical spreading beaters for operating widths between 6 – 8 m
- Fan-shaped spreading tines ensure even crushing of the spreading material



Spreading unit gearbox


- Easy maintenance for a high degree of reliability
- Inspection windows at each spreading unit gearbox enable a fast visual check of oil levels

Technical modifications reserved



Transport floor

- Reliable feed by one (CS 75) or two (CS 95) transport floor lines
- 10 mm thick round steel chains with a breaking load of 13 t each
- Screwed transport floor strips enable easy exchange in case of damage
- 25 mm thick wooden floor

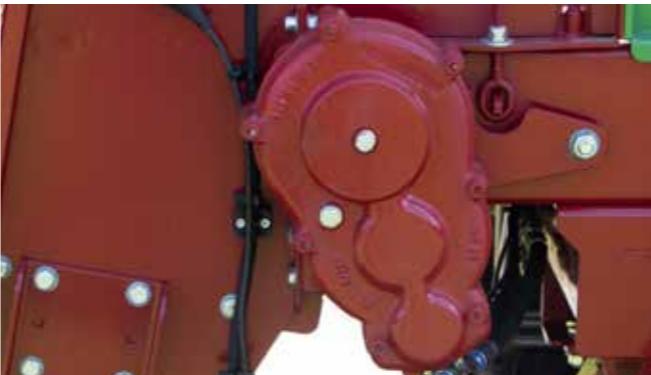

Transport floor drive

- High-torque feed gearing with hydraulic drive
- Adjustment of transport floor speed by means of control valve on the drawbar
- Continuously variable adjustment enables easy and exact adaptation of discharge quantity

Technical modifications reserved

Intelligent design for more comfort

- Superstructure and chassis



Side panel and extensions

- 400 mm high extension panels optionally available to increase the loading capacity
- Extension panels can be folded down to reduce the loading height
 - Easy loading even with farm loaders or smaller tractors
- Side panels can be completely folded down
 - Flexible double use as a transport trailer



Chassis

Standard equipment

- Single axle with various tyre options
- Large tyres for little rolling resistance and protection of sward

Optional equipment on CS 95

- Spring-mounted tandem chassis for maximum driving comfort
- Optimum driving behaviour even during road travel



Grouping of lubrication points

- Optional lubricating strip for upper spreading beater bearings
- Easy and convenient maintenance



Everything under control

- Operation




Direct connection to tractor

- Operation of hydraulic functions via direct tractor connection
- Setting of transport floor speed via flow regulation valve

Technical data

	CS 75 with 520/50 R 17 tyres	CS 95 with 520/50 R 17 tyres
Dimensions		
Length [m]	6.16	6.96
Height [m]	2.84	2.88
Outside wheel width [m]	2.17	2.17
Loading height [m]	1.75	1.79
Dead weight		
Dead weight from [kg]	2,000	2,300
Gross vehicle weight rating		
Gross vehicle weight rating [kg]	5,700	8,000
Power requirement		
Power requirement from	25 kW / 35 HP	36 kW / 50 HP
Inside dimensions of superstructure		
Length [m]	3.70	4.60
Width [m]	1.80	1.80
Side panel height [m]	0.50	0.50
Loading capacity		
Loading capacity [m ³]	7.5	9.5
Spreading unit		
Spreading unit clearance [m]	1.15	1.15

Our solutions for your business at a glance:

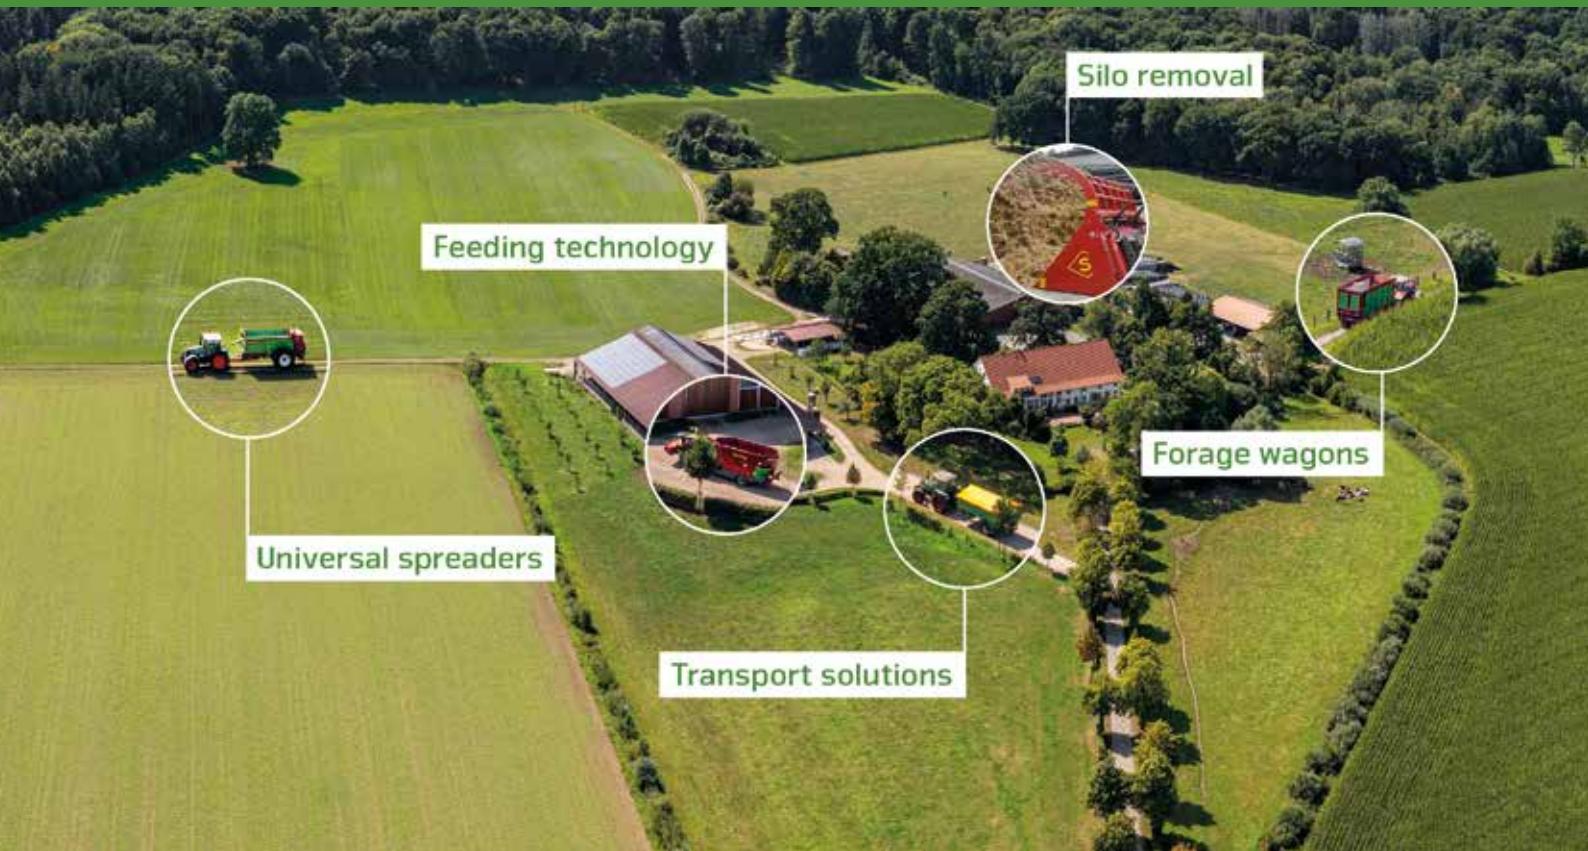

www.strautmann.com

B. Strautmann & Söhne GmbH u. Co. KG



Bielefelder Straße 53
D-49196 Bad Laer
Phone: +49 (0) 5424/802-0
info@strautmann.com
www.strautmann.com